




PROJECT ADDRESS:
2180 AMERICAN LEGION
BOULEVARD,
MOUNTAIN HOME, ID 83647

OWNER:
SHELLEY ESSL, COUNTY CLERK
ELMORE COUNTY
150 SOUTH 4TH EAST, SUITE 3
MOUNTAIN HOME, IDAHO 83647

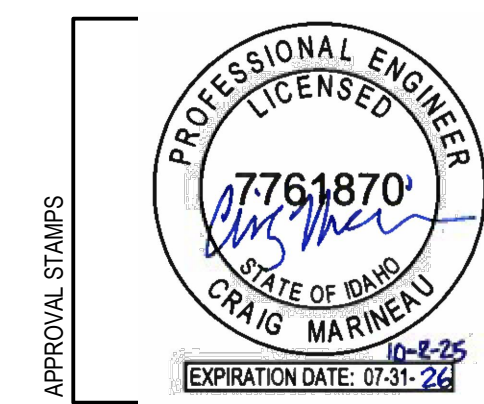

ISSUE INFORMATION

PROJECT NO.: **US0043131.4394**
WSP PRINCIPAL IN CHARGE: **KRISJAN HINER**
WSP PROJECT MANAGER: **RICHARD SERVOS**
OWNER APPROVAL:

GENERAL NOTES

CO 02

COPYRIGHT GOLO. ALL RIGHTS RESERVED.
ORIGINAL SHEET SIZE IS 30"x42"

1. NEAR-SURFACE, HIGH PLASTICITY SOILS SHOULD BE LIMITED TO USE IN DEEP PORTIONS OF FILL BUT NOT AS ENGINEERED FILL WITHIN THE UPPER 5 FEET OF BUILDING, WATER TANK, OR PAVEMENT FINISHED GRADE. CONTRACTOR TO PROVIDE A UNIT RATE FOR UNDERCUTTING AND REPLACING THESE SOILS.

- C. CONTRACTOR SHALL REPLACE THE PAVEMENT SURFACE TO ENSURE MATCH LINE DOES NOT FALL WITHIN THE WHEEL PATH OF A LANE.

WATER TO CROSS EACH OTHER AND THE SEWER LINE IS LESS THAN 18 INCHES BELOW OR ABOVE THE WATER MAIN, THE SEWER LINE CROSSING SHALL BE P.V.C. PRESSURE PIPE CONFORMING TO AWWA C-900 OR ASTM D2241, FOR A DISTANCE OF 10' ON BOTH SIDES OF THE WATER LINE. ONE FULL LENGTH OF BOTH WATER MAIN AND SEWER LINE SHALL BE CENTERED OVER THE CROSSING POINT SO THAT ALL JOINTS WILL BE AS FAR FROM

16. THE TRENCH BACKFILL ABOVE THE PIPE ZONE WILL BE INSPECTED BY THE ITD OR BY THE DEVELOPER'S ENGINEER IN ACCORDANCE WITH THE LATEST EDITION OF THE "CONSTRUCTION QUALITY ASSURANCE MANUAL". COMPACTION TESTS ARE REQUIRED ON THE BACKFILL ABOVE THE PIPE ZONE, WITHIN PUBLIC RIGHT-OF-WAY. TESTING SHALL BE CONDUCTED TO MEET ALL ITD REQUIREMENTS AND THE RESULTS SHALL BE SUBMITTED TO PUBLIC WORKS DEPARTMENT AND ITD PRIOR TO FINAL ACCEPTANCE.

NOTE:
CONTRACTOR SHALL MAINTAIN A CURRENT COPY OF
ALL PROJECT SPECIFICATIONS AND STANDARDS AT
THE JOBSITE DURING CONSTRUCTION.

13. LIMITS OF CONSTRUCTION SHALL BE AS SHOWN IN THE PLAN SET.